
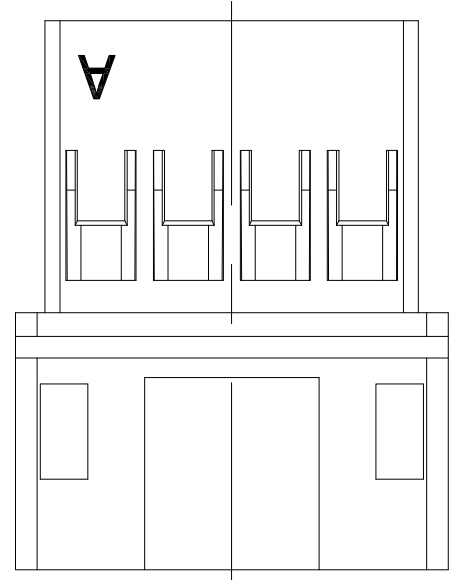
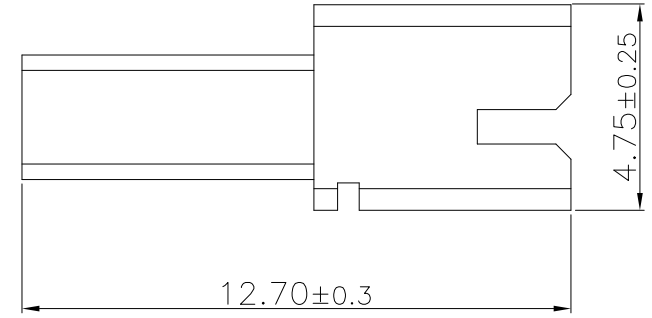


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0	-	Release	吴丹平	2017.06.02

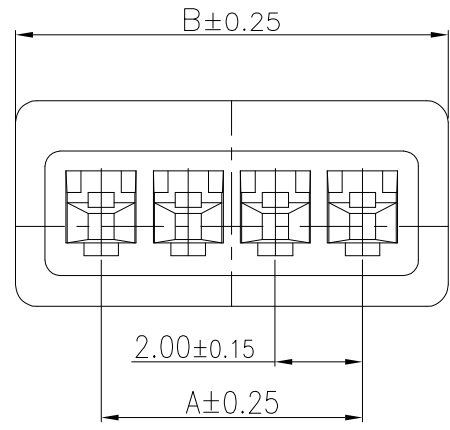

线数 (N)	尺寸 mm	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

**技术说明:**

**Craft specifications**

1. 材质 Material: PA66, UL94V-0.
2. 额定电流 Current rating: 1.0A AC, DC
3. 额定电压 Voltage rating: 50V AC, DC
4. 温度范围 Temperature range: -25°C to 85°C
5. 接触电阻 Contact resistance: ≤20 mΩ
6. 绝缘电阻 Insulation resistance: ≥500 MΩ

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE
<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: C2002R -
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:
.X±0.3	.X±2'	APPD: 邵敬和		C2002R-**-21
.XX±0.25	.XX±1'	CHKD: 田峰		DWG NO.:
--	--	DR: 吴丹平		JKUN-GCCP-0627
UNITS: mm		SCALE		SHEET
		1 : 1		1 / 1