
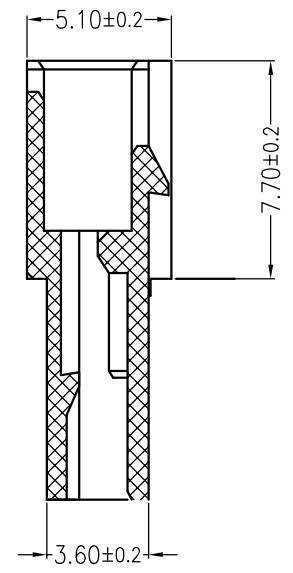
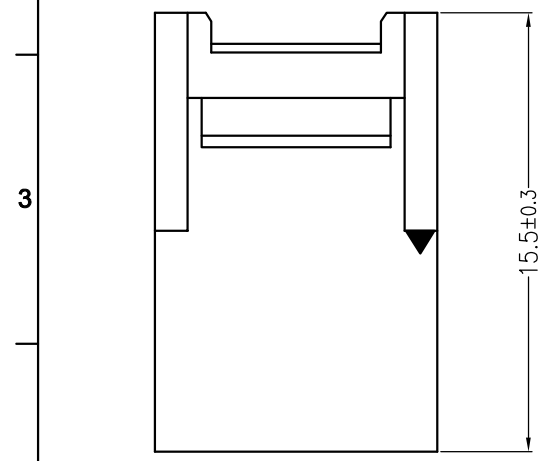


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.05.31

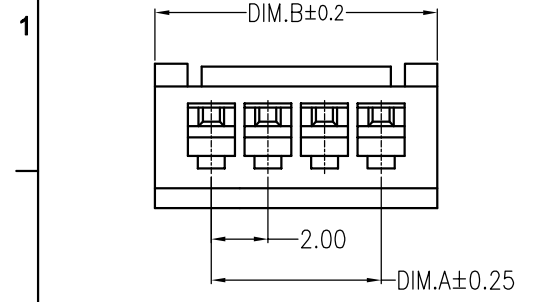

**主要技术参数 Main Specifications**

- 线 数 (Poles): 02 to 16
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐 电 压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

**ORDER INFORMATION:**

**C2003R-\*\*-A5W-P**

PART No. _____		PACKAGING: _____
No. OF CIRCUITS: _____		P=PE
**		PLASTIC MATERIAL: _____
		A5W=PA66 (WHITE)

Circuits	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.0
05	8.00	12.0
06	10.00	14.0
07	12.00	16.0
08	14.00	18.0
09	16.00	20.0
10	18.00	22.0
11	20.00	24.0
12	22.00	26.0
13	24.00	28.0
14	26.00	30.0
15	28.00	32.0
16	30.00	34.0

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE

<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: 2.0mmPITCH Housing	
X.±0.5	X.±5'	USE:	PART NO.:	
.X±0.3	.X±2'	CUSTOMER	C2003R-**-A5W-P	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田 峰	JKUN-GCCP-0628	
⊕	◁	UNITS: mm	DR: 吴丹平	SCALE 1 : 1
				SHEET 1 / 1