


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2017.10.12

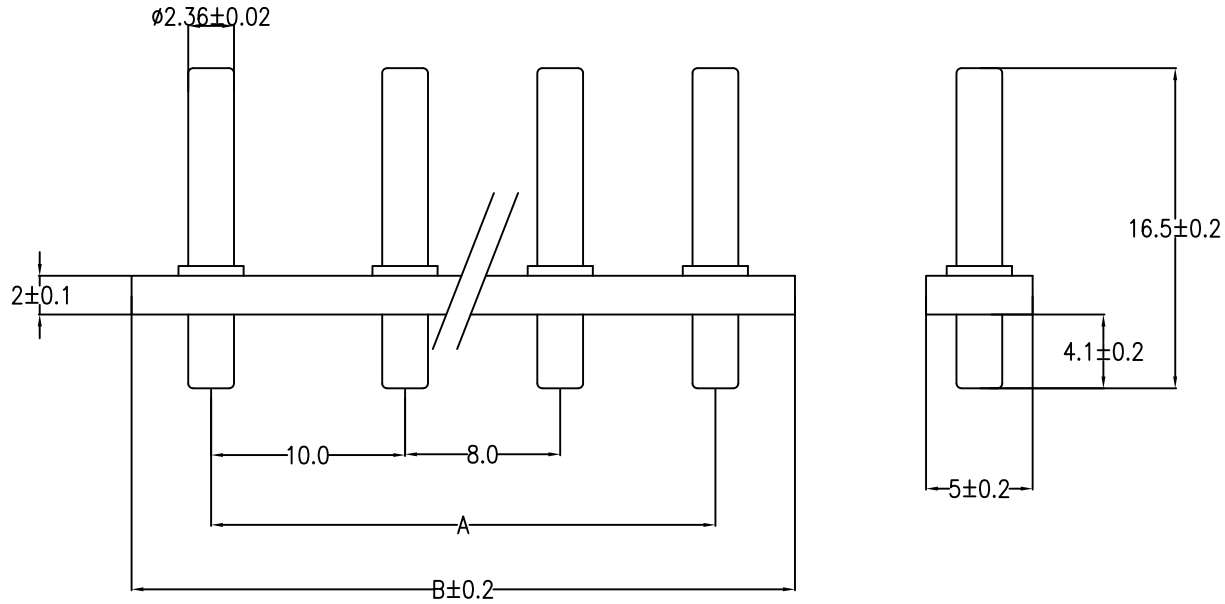

主要技术参数 Main Specifications

线 数 (Poles): 2 to 6
 接触电阻 (Contact resistance): $\leq 10m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 5.0A AC DC
 耐 电 压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1080A--A5GA-P**

PART No.		PACKAGING:
No. OF CIRCUITS:		P=PE
02~06		PLATING:
PLASTIC MATERIAL:		A=Sn
A5G=PA66 (GRAY)		

孔位	A	B
2	10.0	18.2
3	18.0	26.2
4	26.0	34.3
5	34.0	42.8
6	42.0	51.0

C	B	A	ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
	CONTACT				2~6 PCS	Brass	Sn-plated
	PEDESTAL				1 PCS	PA66	COLOR:GRAY

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: A1080A-**-03P 10.0/8.0mmPITCH 180°WAFER	
X.±0.5	X.±5'	USE:	CUSTOMER	
.X±0.3	.X±2'		APPD:	PART NO.:
.XX±0.25	.XX±1'		邵敬和	A1080A-**-A5GA-P
--	--	CHKD:	田 峰	DWG NO.:
		DR:	吴丹平	JKUN/GCCP-0694
UNITS: mm		SCALE	1 : 1	SHEET
				1 / 1