

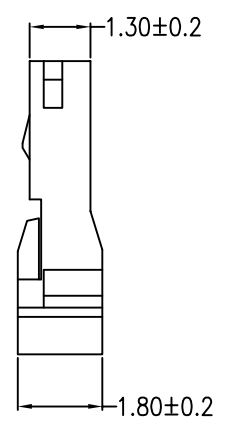
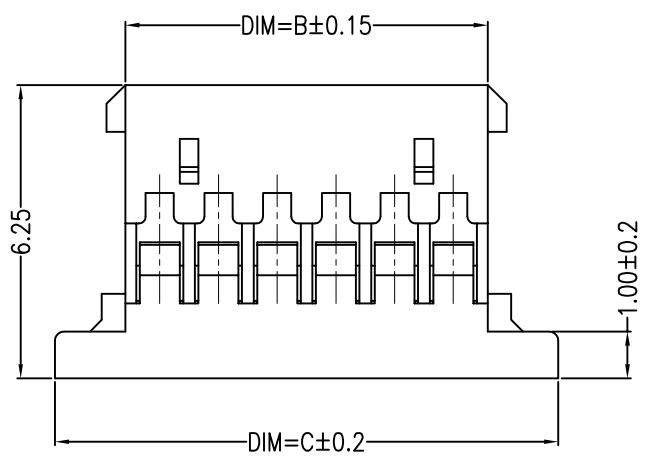
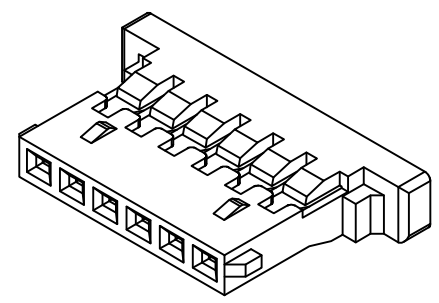






REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	NEW RELEASE	吴丹平	2017.10.12

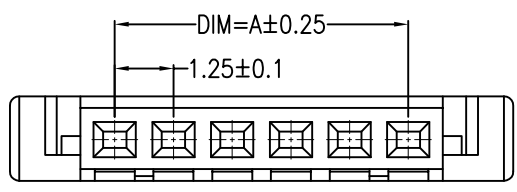

### 主要技术参数 Main Specifications

- 线数 (Poles): 02 to 30
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 125 V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +105^{\circ}C$

### ORDER INFORMATION:

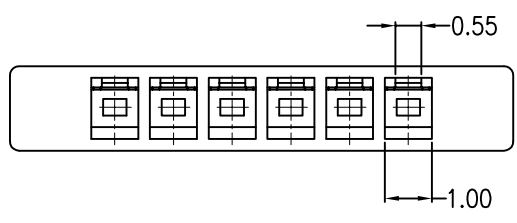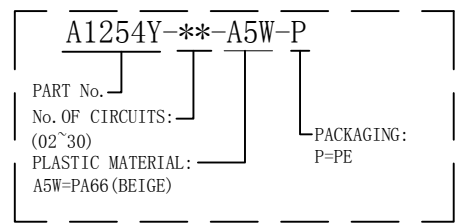

Circuits	Dimensions (mm)		
	DIM=A	DIM=B	DIM=C
02	1.25	2.72	5.72
03	2.50	3.97	6.97
04	3.75	5.22	8.22
05	5.00	6.47	9.47
06	6.25	7.72	10.72
07	7.50	8.97	11.97
08	8.75	10.22	13.22
09	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
13	15.00	16.47	19.47
14	16.25	17.72	20.72
15	17.50	18.97	21.97
20	23.75	25.22	28.22
30	36.25	27.72	40.72

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
A	HOUSING	2~30 PCS	PA66	COLOR:BEIGE
<b>JKUN 温州健坤接插件有限公司</b> <b>WENZHOU JKUN CONNECTOR CO.,LTD.</b>				
.X±0.35			X.±	USE: CUSTOMER
.XX±0.25			.X±	APPD: 邵敬和
.XXX±0.15			.XX±	CHKD: 田峰
--			--	DR: 吴丹平
TITLE: A1254Y 1.25mm PITCH Housing				PART NO.: A1254Y-**-A5W-P
DWG NO.: JKUN/GCCP-0660				SCALE 1 : 1
UNITS: mm				SHEET 1 / 1