


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Tianfeng	2018/06/28

PCB LAYOUT

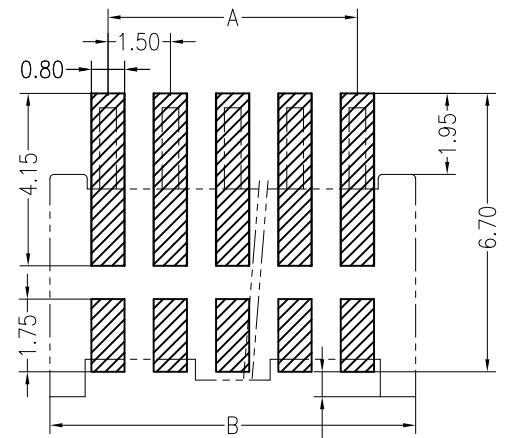




Specifications:

- Poles: 02 to 15
- Contact resistance: $\leq 20m\Omega$
- Insulation resistance: $\geq 1000M\Omega$
- Rated voltage: 350V AC DC
- Rated current: 3.0A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
- Housing: LCP UL94V-0, Natural (Beige)
- Contacts: Phosphor Bronze/MATTE Sn
- Cap: LCP UL94V-0, Natural (Beige)



ORDER INFORMATION:

A1505AWV--F4MB1-R-X**

PART No. _____	X: CAP
No. OF CIRCUITS: _____	PACKAGING:
QB _____	R=REEL
PLASTIC MATERIAL: _____	B=BE
F4M=LCP(BEIGE)	Metal code:
	1=PhosphorBronze
	PLATING:
	B=MATTE Sn

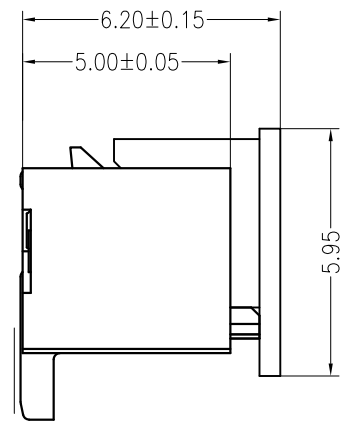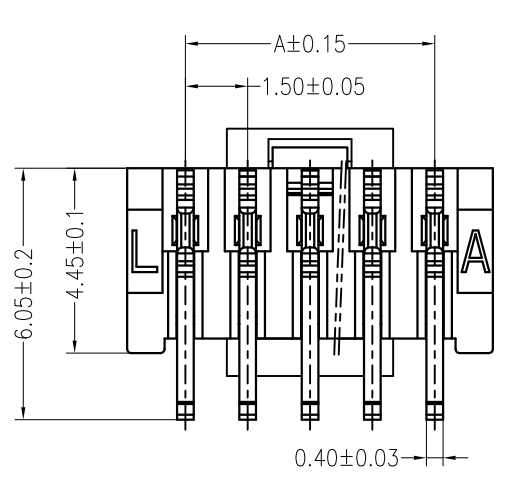

3D VIEWS

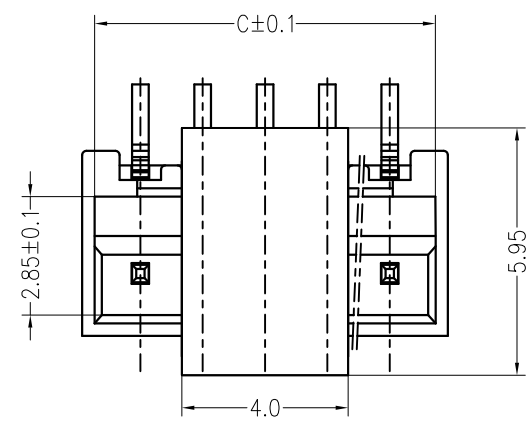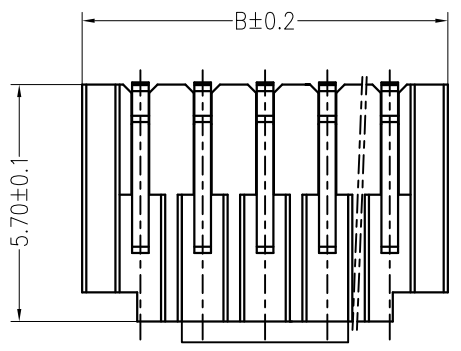

PIN.	DIM A	DIM B	DIM C
2pin	1.50	4.30	3.70
3pin	3.00	5.80	5.20
4pin	4.50	7.30	6.70
5pin	6.00	8.80	8.20
6pin	7.50	10.30	9.70
7pin	9.00	11.80	11.20
8pin	10.50	13.30	12.70
9pin	12.00	14.80	14.20
10pin	13.50	16.30	15.70
11pin	15.00	17.80	17.20
12pin	16.50	19.30	18.70
13pin	18.00	20.80	20.20
14pin	19.50	22.30	21.70
15pin	21.00	23.80	23.20

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 1.5mmPITCH 180°WAFER SMT TYPE	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ±0.50	X. ±5°	APPD: Liuzhenling	A1505AWV-**-F4MB1-R-X
X.X ±0.30	X.X ±2°	CHKD: Wangliang	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: Jiangjiayin	JKUN-GCCP-0787
UNITS: mm		SCALE 1 : 1	SHEET 1 / 1