

A

B

C


D

E



F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	李润	2016.07.01

1



2

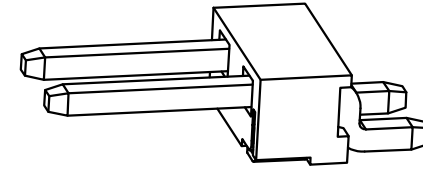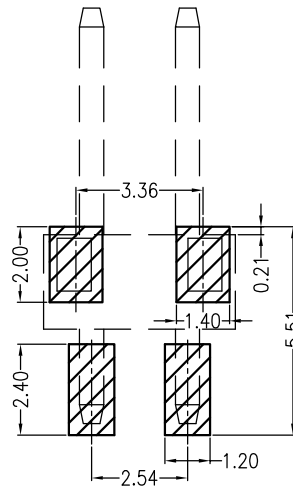

主要技术参数 Main Specifications

线 数 (Poles): 02 to 04

接触电阻 (Contact resistance): $\leq 20m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$

额定电压 (Rated voltage): 125V AC DC

额定电流 (Rated current): 1.0A AC DC


耐电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$


ORDER INFORMATION:

L015AWR-02-F2MA2-R			
PART No.		PACKAGING:	P=PE R=REEL
No. FOR CIRCUITS:	02	Metal material:	2=Brass
PLASTIC MATERIAL:	F2M=LCP (BEIGE)	PLATING:	A=Sn

3

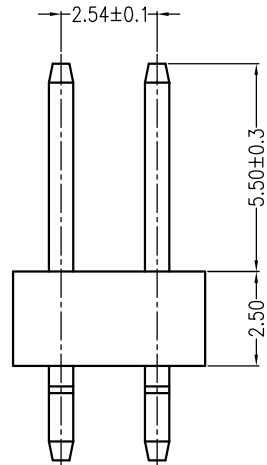

4

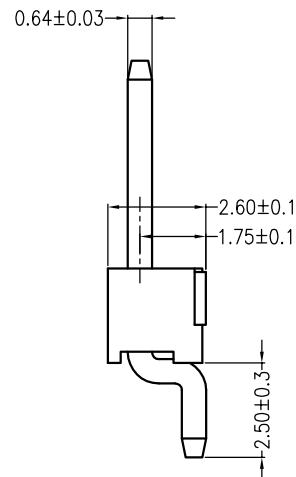

5

A

B

C

D

E

F

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	Solder Tab	2 PCS	PhosphorBronze	Sn-plated
B	CONTACT	2 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: L015AWR-02-01*
2.54mmPITCH 90°WAFER SMT TYPE

X.±0.5 X.±5'

USE:
CUSTOMER

PART NO.:

.X±0.3 .X±2'

APPD:


L015AWR-02-F2MA2-R

.XX±0.25 .XX±1'

CHKD:

DWG NO.:

JKUN-GCCP-0251



UNITS:
mm

DR: 蒋建银

SCALE

1 : 1

SHEET

1 / 1