

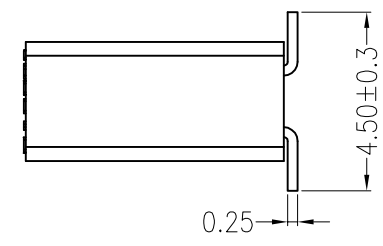
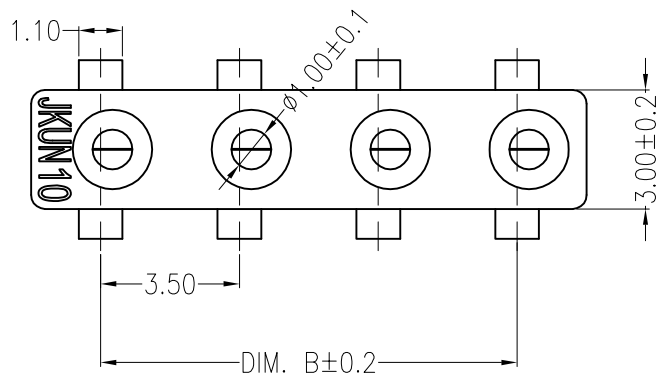


A B C D E F

| REV | ECN No. | DESCRIPTION | DESIGN | DATE |
|-----|---------|-------------|--------|------------|
| A0 | | Release | 吴丹平 | 2017.05.15 |


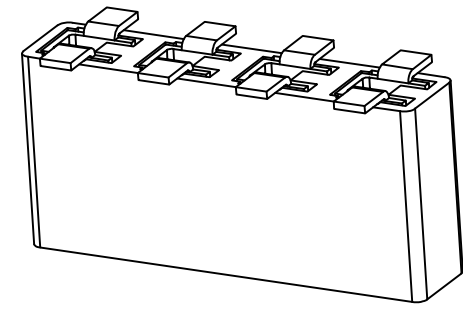


| Circuit | Dimensions (mm) | |
|---------|-----------------|--------|
| | DIM. A | DIM. B |
| L013-01 | 3.50 | |
| L013-02 | 7.00 | 3.50 |
| L013-03 | 10.50 | 7.50 |
| L013-04 | 14.00 | 10.50 |

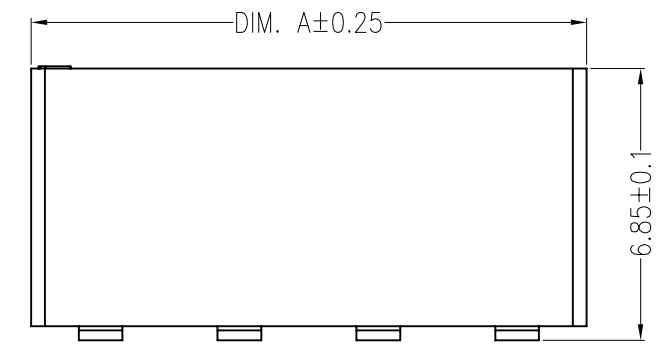

主要技术参数 Main Specifications

线数 (Poles): 01 to 04P
 额定电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 800M\Omega$
 额定电压 (Rated voltage): 250 V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$
 ORDER INFORMATION:

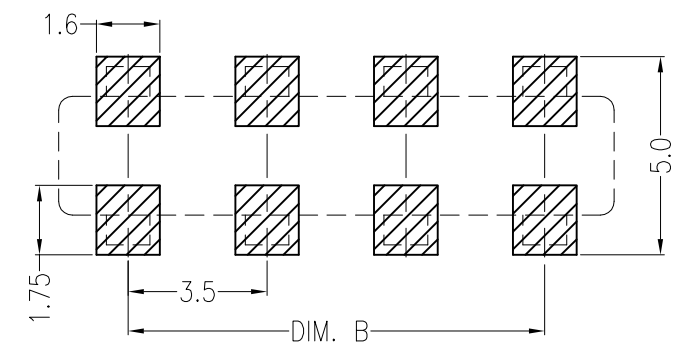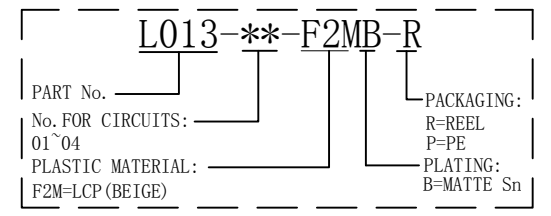

Board Layout

| | | | | |
|------|-----------|---------|----------------|-----------------------|
| C | | | | |
| B | CONTACT | 1~4 PCS | PhosphorBronze | MATTE Sn-plated |
| A | PEDESTAL | 1 PCS | LCP | UL 94V-0, COLOR:BEIGE |
| ITEM | COMPONENT | Q'TY | MATERIAL | FINISH |

| | | | | |
|--|--------|-------|--|-------|
| JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD. | | | TITLE: L013-**-1R 3.5mmPITCH 180°WAFER SMT TYPE | |
| X.±0.5 | X.±5' | USE: | CUSTOMER | |
| .X±0.3 | .X±2' | | | |
| .XX±0.25 | .XX±1' | APPD: | PART NO.: | |
| -- | -- | CHKD: | L013-**-F2MB-R | |
| ⊕ | ☐ | DR: | DWG NO.: | |
| UNITS: mm | | 吴丹平 | JKUN/GCCP-0026 | |
| | | | SCALE | SHEET |
| | | | 1 : 1 | 1 / 1 |

A B C D E F