
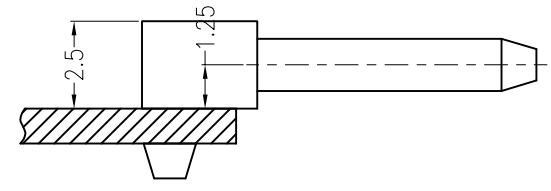
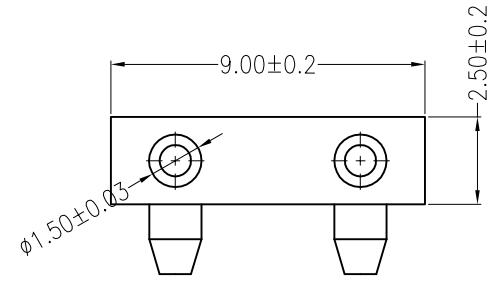


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	王启生	2014.12.15




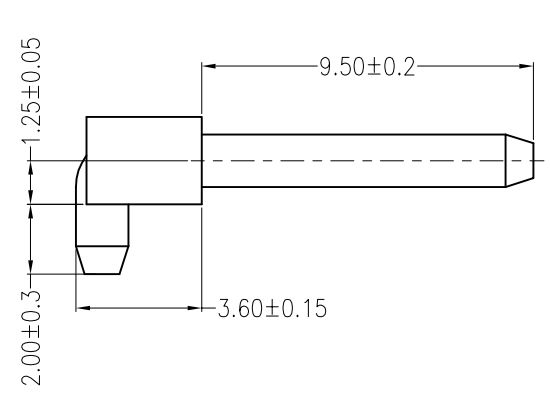


Assembly Layout

主要技术参数 Main Specifications

- 线数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$

ORDER INFORMATION:

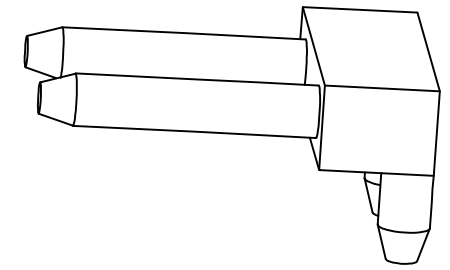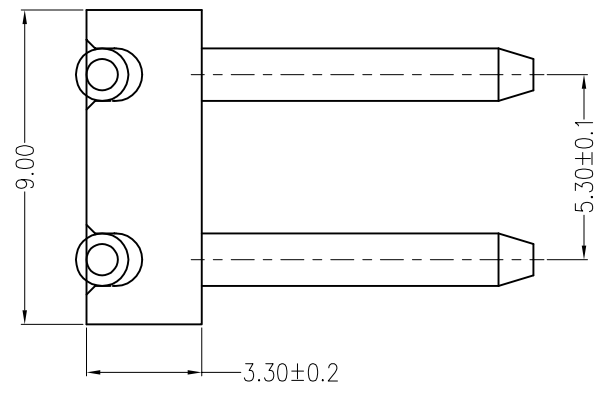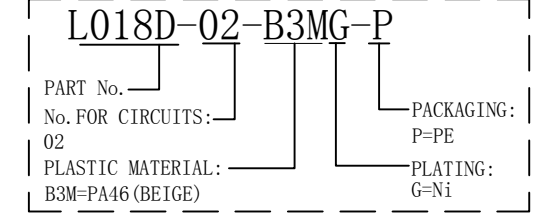

Mating PCB detail

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	Brass	Ni-plated
A	PEDESTAL	1 PCS	PA46	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: - 5.3mmPITCH 90°WAFER DIP TYPE	
X.±0.5	X.±5'	USE: CUSTOMER APPD: 邵敬和 CHKD: 田峰	PART NO.:
.X±0.3	.X±2'		L018D-02-B3MG-P
.XX±0.25	.XX±1'	DR: 蒋建银	DWG NO.:
--	--		JKUN/GCCP-0035
UNITS: mm		SCALE	SHEET
		1 : 1	1 / 1