

A

B



C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.04.18

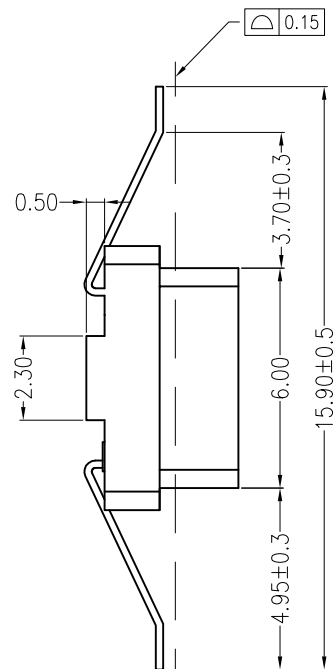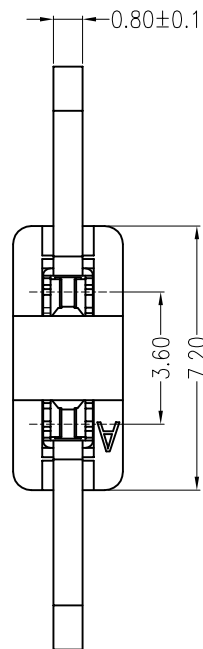

主要技术参数 Main Specifications

线 数 (Poles): 02 to 12

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 125V AC DC




额定电流 (Rated current): 1.0A AC DC

耐 电压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

PART No.		L020Y-02-F2MB1-* -2	
No.OF CIRCUITS:	04	SPECIAL CODE:	2=Big distance
PLASTIC MATERIAL:	F2M=LCP(BEIGE)	PACKAGING:	R=REEL P=PE
		PLATING:	B=MATTE Sn
		Metal code:	1=PhosphorBronze

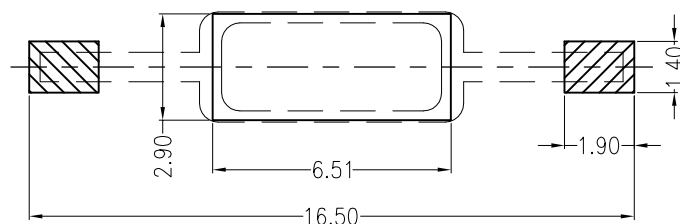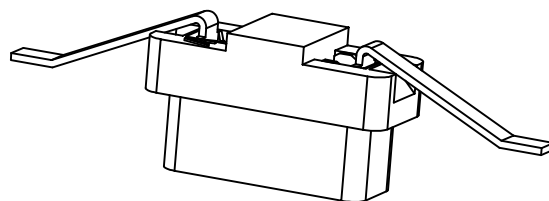

Board Layout

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: L020Y-02-2* 3.6Pitch 180°wafer smt type	
X.±0.5	X.±5'	USE:	PART NO.:
.X±0.3	.X±2'	CUSTOMER	L020Y-02-F2MB1-* -2
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:
--	--	CHKD: 田峰	JKUN-GCCP-0449
⊕	◁	UNITS: mm	DR: 吴丹平
		SCALE	SHEET
		1 : 1	1 / 1

A

B

C

D

E

F