
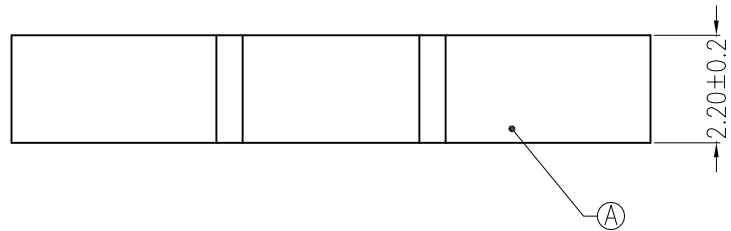




REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	Release	蒋建银	2018.01.10

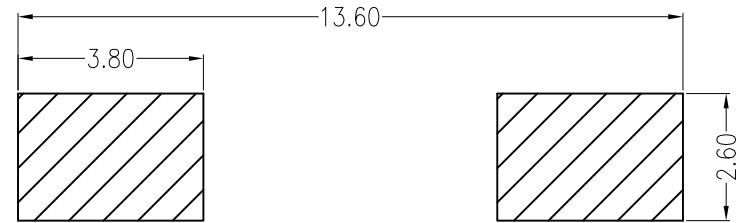

**主要技术参数 Main Specifications**

- 线 数 (Poles): 01
- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
- 绝缘电阻 (Insulation resistance):
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐 电压 (Withstand Voltage):
- 温度范围 (Temperature Range):  $-40^{\circ}C \sim +125^{\circ}C$

**ORDER INFORMATION:**

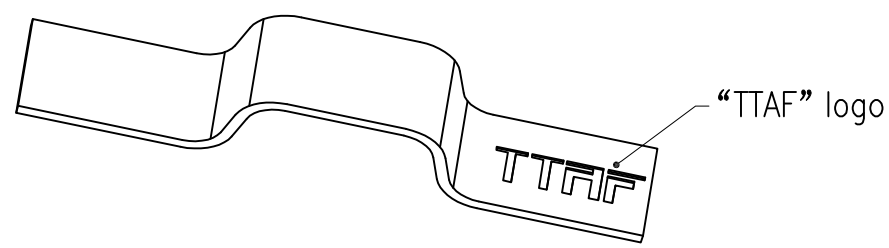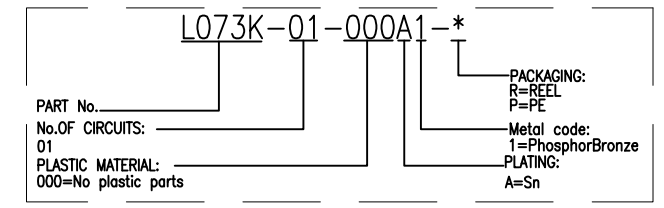

C				
B				
A	CONTACT	1 PCS	PhosphorBronze	Sn-plated
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.				TITLE: L073K 180°wafer smt type
.X±0.35	X.±	USE:	PART NO.:	
.XX±0.25	.X±	CUSTOMER	L073K-01-000A1-R	
.XXX±0.15	.XX±	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田 峰	JKUN/GCCP-0430	
		UNITS: mm	DR: 蒋建银	SCALE: 1 : 1
				SHEET: 1 / 1