
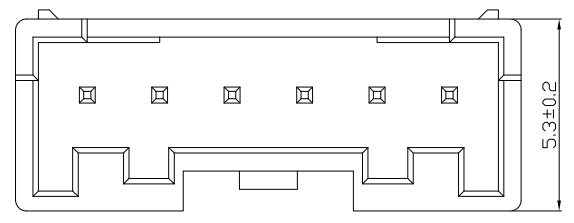
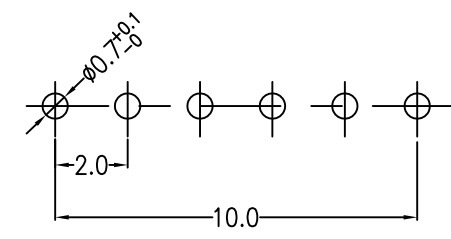
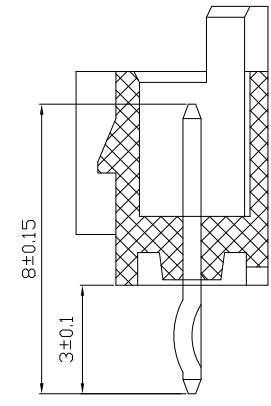


| REV | DESCRIPTION | DESIGN | DATE       |
|-----|-------------|--------|------------|
| A0  | NEW RELEASE | 蒋建银    | 2019/06/27 |

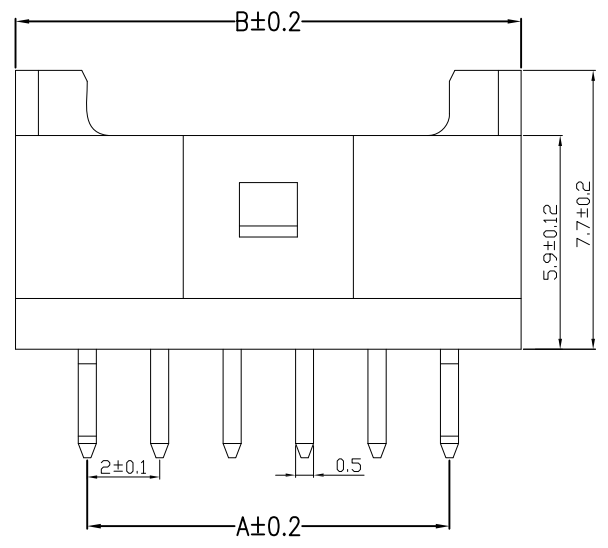

Specifications:

- Poles: 2~15P
- Contact resistance:  $\leq 20m\Omega$
- Insulation resistance:  $\geq 1000M\Omega$
- Rated voltage: 250V AC DC
- Rated current: 3.0A AC DC
- Withstand Voltage: 1000V AC/minute
- Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$
- Housing: PA66 UL94V-0, Natural(White)
- Contacts: Brass/Sn-plated

|    |     |     |      |      |      |      |      |      |      |      |      |      |      |      |
|----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|
| B  | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | 22.0 | 24.0 | 26.0 | 28.0 | 30.0 | 32.0 |
| A  | 2.0 | 4.0 | 6.0  | 8.0  | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 | 22.0 | 24.0 | 26.0 | 28.0 |
| 孔数 | 2   | 3   | 4    | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 15   |

|   |                      |                            |  |
|---|----------------------|----------------------------|--|
| <b>JKUN</b> 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO., LTD. |                      | TITLE:<br>PA直针打K无柱         |  |
| GENERAL TOLERANCE   |                      | USE:<br>CUSTOMER           |  |
| X. $\pm 0.50$   | X. $\pm 5^{\circ}$   | PART NO.:<br>A2008A-**-08P |  |
| X.X $\pm 0.30$  | X.X $\pm 2^{\circ}$  | DWG NO.:<br>-              |  |
| X.XX $\pm 0.20$   | X.XX $\pm 1^{\circ}$ | SCALE<br>1 : 1             |  |
| UNITS:<br>mm  |                      | SHEET<br>1 / 1             |  |
| DR:<br>蒋建银  |                      | APPD:<br>刘振岭               |  |
| CHKD:<br>王亮   |                      | CHKD:<br>王亮                |  |